


CH121-CH123

Flush mounting thermostat, with batteries or power supply at 230V-50Hz

Thermostat with microprocessor to control heating and air-conditioning installations.

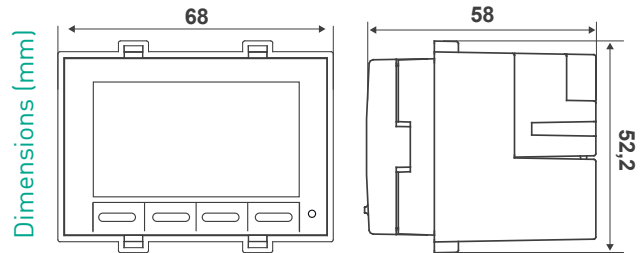

	Temperature regulation range	Prescribed differential*	Temperature displayed range	Adjustable antifreeze temperature range	Power supply	Contacts rating
CH121	2 ÷ 40 °C	0,25 K	-40 ÷ 50 °C	0 ÷ 7 °C	2 batteries AAA 1,5V	5(3)A 250Vca
CH123	2 ÷ 40 °C	0,25 K	-40 ÷ 50 °C	0 ÷ 7 °C	230V 50Hz	5(3)A 250Vca

* Differential values are referred to a thermal gradient of 4K/h.

ELECTRICAL CHARACTERISTICS


Contacts rating: 5(3)A 250Vca.

Power supply without connection to the electric circuit with two 1,5 V AAA alkaline batteries for CH121.

Power supply from the electric circuit - 230V-50Hz for CH123.

Micro disconnection (1BU).

Voltage-free switching contact.



HOMOLOGATION AND STANDARDS

Complies with EN 60730-2-9 standards.

ErP Class IV; 2% (Reg. EU 811/2013 - 813/2013)

INSTALLATION


Flush-mounting in 3-module 503 embedded boxes by means of 2 screws (supplied).

Two-wire connection with the user.


Install the thermostat at 1,5 meters above the floor, away from kitchens, heat sources, windows and doors.

Can be applied, without any connection accessory, the following plates:


INCLUDED IN THE PACKAGE:

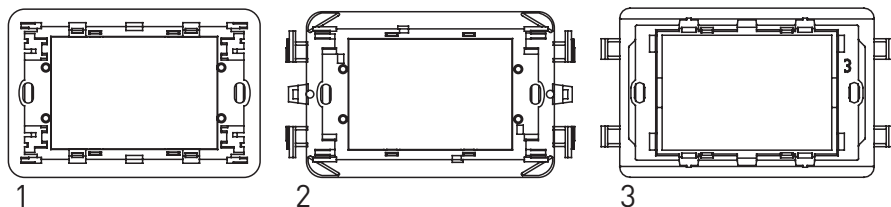

3 FRAMES to provide compatibility with the most common plates



A



B

3 COVER "A" for Bticino Axolute, Ave Sistema 44, Eikon Evo and Arkè

- WHITE
- SILVER
- ANTHRACITE

3 COVER "B"

- WHITE
- SILVER
- ANTHRACITE



3 PAIRS OF ADAPTERS

- WHITE
- SILVER
- ANTHRACITE


1 PAIR OF ADAPTERS for Bticino Matix

- WHITE

COMPATIBLE PLATES

MODELS	COVER TYPE	FRAME TYPE	LATERAL ADAPTERS
Bticino Living International and Transizione Piana	B	1	NO
Bticino Living Light Air	B	3	NO
Bticino Light, Light tech	B	1	NO
Bticino Axolute	A	1	NO
Bticino Axolue Air	A	cod. 1571049	NO
Bticino Matix	B	2	YES (included)
Vimar Idea e Rondò	B	2	YES
Vimar Plana e Eikon	B	1	NO
Vimar Eikon Evo	A	3	NO
Vimar Arkè	A	3	NO
Gewiss Chorus One, Lux, Art	B	2	NO
Ave sistema 45: Zama, Banquise, Yes, Ral	B	2	YES
Ave sistema 44: Zama, Personal, Tecnopolimero	A	1	NO
Legrand Cross, Vela quadra, Vela tonda	B	2	NO
ABB Elos	B	cod. 1571049	YES
ABB Mylos	B	cod. 1571049	NO

ADDITIVE FRAME cod. 1571049



Frame for plates Bticino Axolute Air, ABB Elos e ABB Mylos, not included in the package.

OPERATION

With CH121 is possible to extract thermostat's body from the frame after mounting and connections, this for doing more easily the adjusting or programming with the device in hand.

With CH143 isn't possible to extract thermostat's body.

The thermostat has:

- 4 front keys to access directly the operating modes that can be changed by pressing the corresponding key.

VISUALIZATION

- Ambient temperature
- 4 icons for programming



When the temperature increases: 1-2 opens and close 1-4

3 operation modes:

- COMFORT
- ECONOMY
- OFF

OFF operation mode can be used as "antifreeze" mode or to shutdown completely the system (OFF).

3 set temperatures:

- COMFORT
- ECONOMY
- OFF

COMFORT operates system's comfort temperature that can be set from 2°C to 40°C.

ECONOMY operates system's economy temperature that can be set from 2°C to 40°C.

OFF temperature set in the "regulation" mode from 0 to 7°C to ensure frost protection function..

SUMMER-WINTER control

Possibility to connect a high or low limit temperature probe.

FEATURES

The packaging includes:

- 3 coloured covers,
- 3 special covers for Bticino Axolute and Ave Sistema 44, Eikon Evo,
- 3 pairs of coloured adapters,
- 1 pair of adapters for Bticino Matix.

LCD display: 7-segment symbols and digits.

LED, back lighting (blue) display.

Adjustable backlight duration.

Possibility to visualize Celsius or Fahrenheit temperature values.

Maximum ambient temperature 45 °C.

Settable differential.

Protection degree IP20.